


Connection Block Diagram of Expert Net Control 2304-1

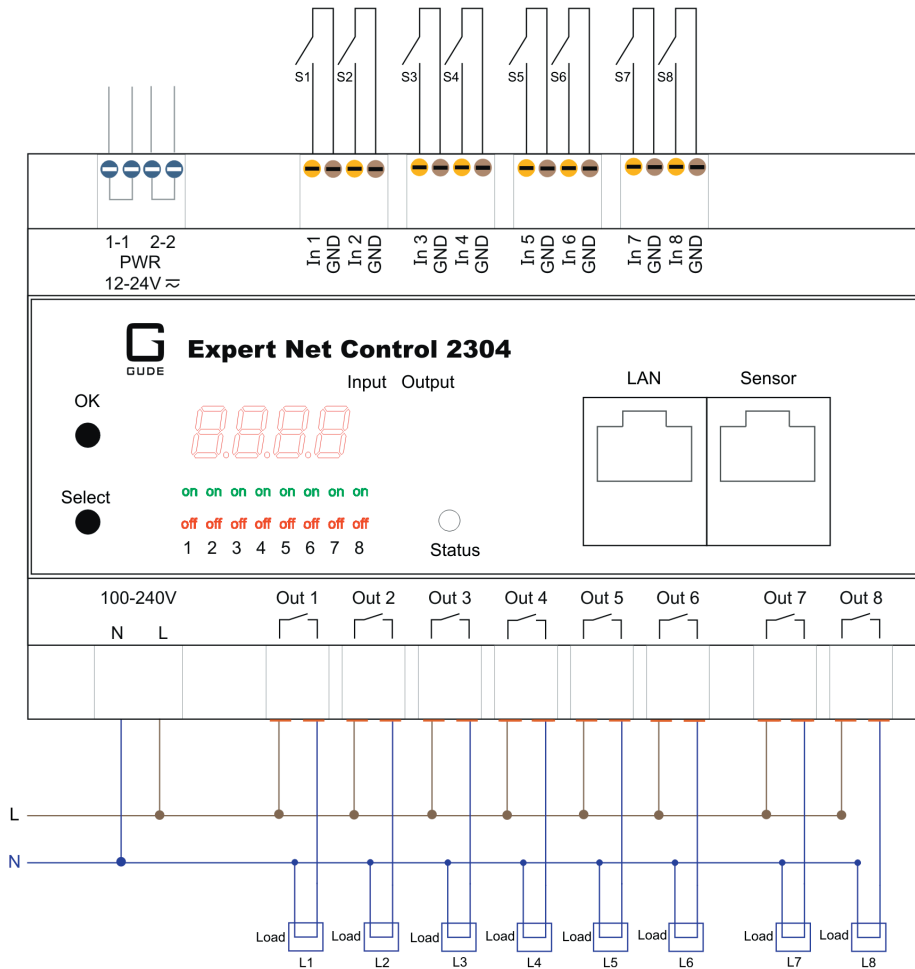

Ordering Information

Order code	Product	Feature	Power supply
2304-1	Expert Net Control 2304-1	8 switchable outputs, 8 passive signal inputs, 1 sensor port	230 V AC or 24 V DC
7105	Temp., Humidity Sensor 7105	Cable sensor, RJ45 connector, -20°C to +80°C, 0-90% humidity, cable ca. 2.3 m	
7106	Temp., Humidity, Air pressure Sensor 7106	Cable sensor, RJ45 connector, 20°C to +80°C, 0-90% humidity, 300-1100 hPa, cable ca. 2.3 m	
7202	Temp./Humidity Sensor 7202	Box case with RJ45 socket, -20°C to +80°C, 0-90% humidity	
7311	Optical Smoke Detector 7311	Overhead installation (d=100 mm), screw terminal NO or NC	
7312	Thermal Smoke Detector 7312	Overhead installation (d=100 mm), screw terminal NO or NC	
7313	Leakage Point Sensor 7313	13 mm two-tined, detects flooding, 4-core wire (2.5 m)	
7940	Comb. Signaling Device 7940	Optical/acoustic alarm device, 100 dB sound pressure, 3-core connection cable (0.4 m)	