


Layout of Expert Power Control 8291-2 (simplified)

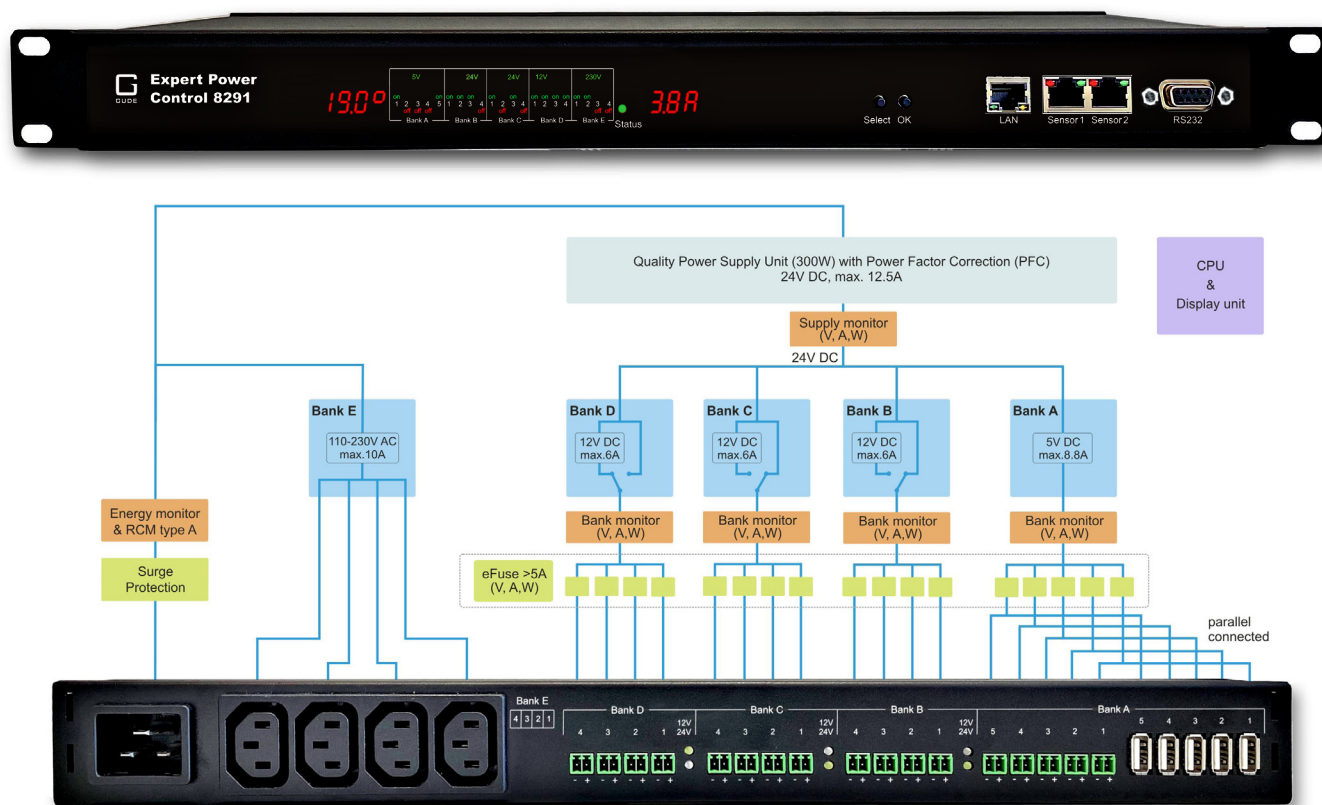

Ordering Information

Order Code	Product	Features
8291-2	Expert Power Control 8291-2	4 x IEC C13 (110-230 V), 3 x 4 x PTR multi-connector (12 V or 24 V), 5 x PTR multi-connector (5 V) or 5 x USB type A (5 V, no data transfer), power supply IEC C20; DC outlet-metering; dimensions: LxHxD: 43.9 x 4.4 x 24.1 cm (without brackets), 1 RU
7205*	Temp., Humidity Sensor 7205	Plug-n-play sensor, RJ45 connector, -20°C to +80°C, 0-90% humidity
7206*	Temp., Humidity, Air pressure Sensor 7206	Plug-n-play sensor, RJ45 connector, -20°C to +80°C, 0-90% humidity, 300-1100 hPa
7209	Temp., Humidity, Signal Sensor 7209	Plug-n-play sensor, RJ45 connector, -20°C to +80°C, 0-90% humidity, 2 passive signal inputs
0804	IEC Extension Cable 0804	Extension cable for IEC C13 to C14, length: 3 m
0871	Desk/Wall Bracket 0871	Accessories for mounting a 19-inch device under a tabletop or on a wall

* Sensors also available with calibrated temperature range: 7205-2, 7206-2